

Kermi PASA hinged door

As a made to measure solution.

For installation in recess.

Frameless door with one glass panel, for inwards and outwards opening.

Glass panels with 8 mm single panel safety glass in accordance with EN 12150, with KermiCLEAN as an additional option.

Hinges and handles made of high quality metal.

Hinges with rising hinge mechanism and completely integrated on the inside of the glass.

End-to-end magnetic seals and sealing profiles, horizontal sealing strip with water repellent effect.

Can be installed with floor sill (height 6 mm) or without floor sill (off-floor).

Due to the design of PASA 100% water tightness may not be achievable.

Fixing pack and a freely placeable, transparent towel rail hook included in the scope of delivery.

Made in Germany.

Tested in accordance with DIN EN 14428 (CE) and PPP 53005 (TÜV / GS).

20 years guaranteed availability on all spare parts after discontinuation of model.

Quality management system certified in accordance with DIN EN ISO 9001:2015.

Environmental management system certified in accordance with DIN EN 14001:2015.

Energy management system certified in accordance with DIN EN 50001:2011.

Product line	Kermi PASA		
Product code	PA 1TO		
Design	Hinge right / left		
	Width:	mm	
	Height:	mm	
	Colour:		
	Glass:		

Order subject to measuring by trained staff or Kermi staff!



This tender specification is a model specification. Modifications according to the requirements of the contractor always have to be considered. Therefore no claim to accuracy and conformity according to construction tendering and contract regulations. All liability excluded.

Kermi PASA hinged door and fixed panel

As a made to measure solution.

For installation in recess.

Frameless door with one glass panel, for inwards and outwards opening, and a fixed panel.

Optional with PASA stabilizer (inside). The used stabilizer increases the height of the product by 32 mm.

Glass panels with 8 mm single panel safety glass in accordance with EN 12150, with KermiCLEAN as an additional option.

Hinges and handles made of high quality metal.

Hinges of door with rising hinge mechanism and completely integrated on the inside of the glass.

End-to-end magnetic seals and sealing profiles, horizontal sealing strip with water repellent effect.

Can be installed with floor sill (height 6 mm) or without floor sill (off-floor).

Due to the design of PASA 100% water tightness may not be achievable.

Fixing pack and a freely placeable, transparent towel rail hook included in the scope of delivery.

Made in Germany.

Tested in accordance with DIN EN 14428 (CE) and PPP 53005 (TÜV / GS).

20 years guaranteed availability on all spare parts after discontinuation of model.


Quality management system certified in accordance with DIN EN ISO 9001:2015.

Environmental management system certified in accordance with DIN EN 14001:2015.

Energy management system certified in accordance with DIN EN 50001:2011.

Product line	Kermi PASA
Product code	PA 1GN
Design	Fixed panel right / left
	Width: mm
	Height: mm
	Colour:
	Glass:

Order subject to measuring by trained staff or Kermi staff!

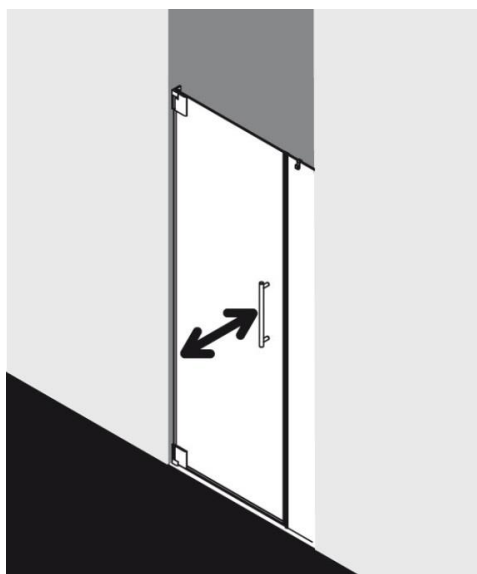

This tender specification is a model specification. Modifications according to the requirements of the contractor always have to be considered. Therefore no claim to accuracy and conformity according to construction tendering and contract regulations. All liability excluded.

Kermi PASA hinged door and shortened fixed panel

As a made to measure solution. For installation in recess.

Frameless door with one glass panel, for inwards and outwards opening, and a shortened fixed panel.

Optional with PASA stabilizer (inside). The used stabilizer increases the height of the product by 32 mm.

Glass panels with 8 mm single panel safety glass in accordance with EN 12150, with KermiCLEAN as an additional option.

Hinges and handles made of high quality metal.

Hinges of door with rising hinge mechanism and completely integrated on the inside of the glass.

End-to-end magnetic seals and sealing profiles, horizontal sealing strip with water repellent effect.

Can be installed with floor sill (height 6 mm) or without floor sill (off-floor).

Due to the design of PASA 100% water tightness may not be achievable.

Fixing pack and a freely placeable, transparent towel rail hook included in the scope of delivery.

Made in Germany.

Tested in accordance with DIN EN 14428 (CE) and PPP 53005 (TÜV / GS).

20 years guaranteed availability on all spare parts after discontinuation of model.


Quality management system certified in accordance with DIN EN ISO 9001:2015.

Environmental management system certified in accordance with DIN EN 14001:2015.

Energy management system certified in accordance with DIN EN 50001:2011.

Product line	Kermi PASA
Product code	PA 1VN
Design	Fixed panel right / left
	Width: mm
	Height: mm
	Colour:
	Glass:

Order subject to measuring by trained staff or Kermi staff!

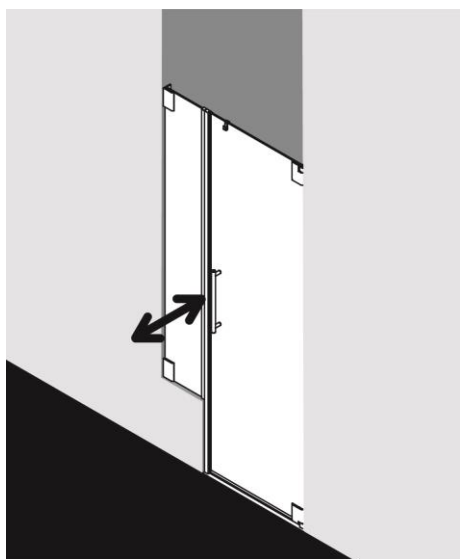

Kermi PASA hinged door with fixed panel

As a made to measure solution.

For installation in recess.

Frameless door with one glass panel, for inwards and outwards opening, and with a fixed panel.

Optional with PASA stabilizer (inside). The used stabilizer increases the height of the product by 32 mm.

Glass panels with 8 mm single panel safety glass in accordance with EN 12150, with KermiCLEAN as an additional option.

Hinges and handles made of high quality metal.

Hinges of door with rising hinge mechanism and completely integrated on the inside of the glass.

End-to-end magnetic seals and sealing profiles, horizontal sealing strip with water repellent effect.

Can be installed with floor sill (height 6 mm) or without floor sill (off-floor).

Due to the design of PASA 100% water tightness may not be achievable.

Fixing pack and a freely placeable, transparent towel rail hook included in the scope of delivery.

Made in Germany.

Tested in accordance with DIN EN 14428 (CE) and PPP 53005 (TÜV / GS).

20 years guaranteed availability on all spare parts after discontinuation of model.


Quality management system certified in accordance with DIN EN ISO 9001:2015.

Environmental management system certified in accordance with DIN EN 14001:2015.

Energy management system certified in accordance with DIN EN 50001:2011.

Product line	Kermi PASA
Product code	PA 1FN
Design	Hinge right / left
	Width: mm
	Height: mm
	Colour:
	Glass:

Order subject to measuring by trained staff or Kermi staff!

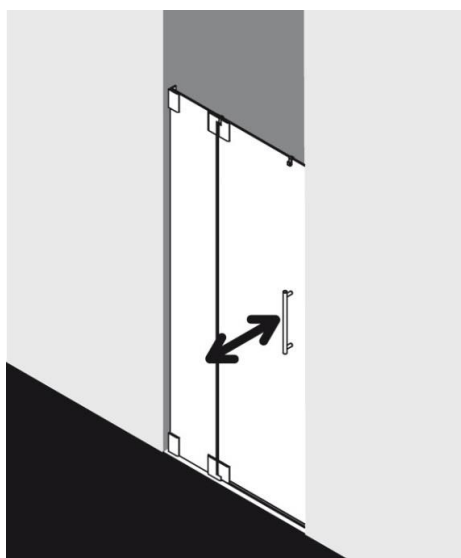

This tender specification is a model specification. Modifications according to the requirements of the contractor always have to be considered. Therefore no claim to accuracy and conformity according to construction tendering and contract regulations. All liability excluded.

Kermi PASA hinged door with two fixed panels

As a made to measure solution.

For installation in recess.

Frameless door with one glass panel, for inwards and outwards opening, and with two fixed panels.

Optional with PASA stabilizer (inside). The used stabilizer increases the height of the product by 32 mm.

Glass panels with 8 mm single panel safety glass in accordance with EN 12150, with KermiCLEAN as an additional option.

Hinges and handles made of high quality metal.

Hinges of door with rising hinge mechanism and completely integrated on the inside of the glass.

End-to-end magnetic seals and sealing profiles, horizontal sealing strip with water repellent effect.

Can be installed with floor sill (height 6 mm) or without floor sill (off-floor).

Due to the design of PASA 100% water tightness may not be achievable.

Fixing pack and a freely placeable, transparent towel rail hook included in the scope of delivery.

Made in Germany.

Tested in accordance with DIN EN 14428 (CE) and PPP 53005 (TÜV / GS).

20 years guaranteed availability on all spare parts after discontinuation of model.


Quality management system certified in accordance with DIN EN ISO 9001:2015.

Environmental management system certified in accordance with DIN EN 14001:2015.

Energy management system certified in accordance with DIN EN 50001:2011.

Product line	Kermi PASA		
Product code	PA 1HN		
Design	Hinge right / left		
	Width:	mm	
	Height:	mm	
	Colour:		
	Glass:		

Order subject to measuring by trained staff or Kermi staff!

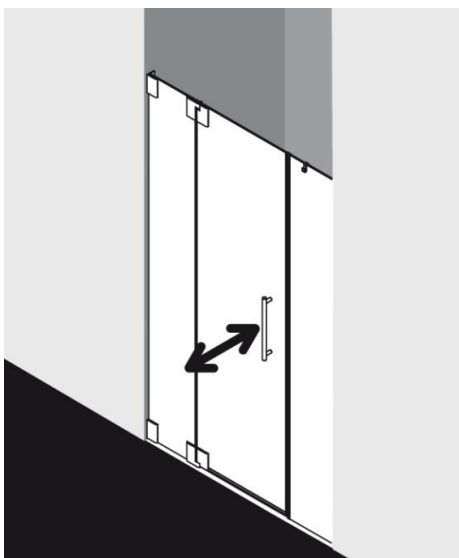

This tender specification is a model specification. Modifications according to the requirements of the contractor always have to be considered. Therefore no claim to accuracy and conformity according to construction tendering and contract regulations. All liability excluded.

Kermi PASA two part hinged door

As a made to measure solution.

For installation in recess.

Frameless two part door, for inwards and outwards opening.

Glass panels with 8 mm single panel safety glass in accordance with EN 12150, with KermiCLEAN as an additional option.

Hinges and handles made of high quality metal.

Hinges with rising hinge mechanism and completely integrated on the inside of the glass.

End-to-end magnetic seals and sealing profiles, horizontal sealing strip with water repellent effect.

Can be installed with floor sill (height 6 mm) or without floor sill (off-floor).

Due to the design of PASA 100% water tightness may not be achievable.

Fixing pack and a freely placeable, transparent towel rail hook included in the scope of delivery.

Made in Germany.

Tested in accordance with DIN EN 14428 (CE) and PPP 53005 (TÜV / GS).

20 years guaranteed availability on all spare parts after discontinuation of model.


Quality management system certified in accordance with DIN EN ISO 9001:2015.

Environmental management system certified in accordance with DIN EN 14001:2015.

Energy management system certified in accordance with DIN EN 50001:2011.

Product line	Kermi PASA	
Product code	PA PTD	
Design	Width:	mm
	Height:	mm
	Colour:	
	Glass:	

Order subject to measuring by trained staff or Kermi staff!

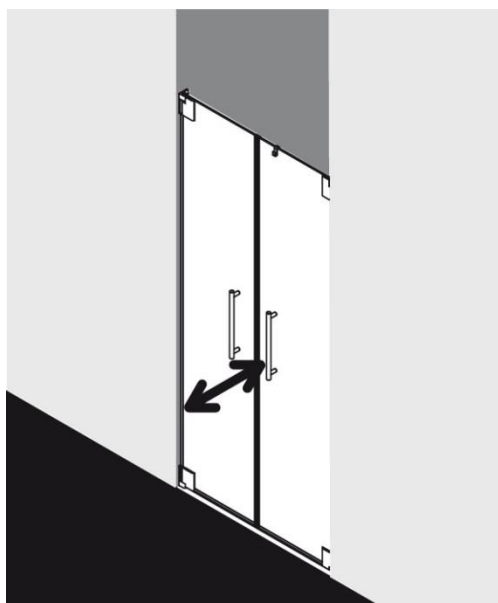

This tender specification is a model specification. Modifications according to the requirements of the contractor always have to be considered. Therefore no claim to accuracy and conformity according to construction tendering and contract regulations. All liability excluded.

Kermi PASA two part hinged door with fixed panel

As a made to measure solution.

For installation in recess.

Frameless two part hinged door, for inwards and outwards opening, and with a fixed panel.

Optional with PASA stabilizer (inside). The used stabilizer increases the height of the product by 32 mm.

Glass panels with 8 mm single panel safety glass in accordance with EN 12150, with KermiCLEAN as an additional option.

Hinges and handles made of high quality metal.

Hinges of door with rising hinge mechanism and completely integrated on the inside of the glass.

End-to-end magnetic seals and sealing profiles, horizontal sealing strip with water repellent effect.

Can be installed with floor sill (height 6 mm) or without floor sill (off-floor).

Due to the design of PASA 100% water tightness may not be achievable.

Fixing pack and a freely placeable, transparent towel rail hook included in the scope of delivery.

Made in Germany.

Tested in accordance with DIN EN 14428 (CE) and PPP 53005 (TÜV / GS).

20 years guaranteed availability on all spare parts after discontinuation of model.


Quality management system certified in accordance with DIN EN ISO 9001:2015.

Environmental management system certified in accordance with DIN EN 14001:2015.

Energy management system certified in accordance with DIN EN 50001:2011.

Product line	Kermi PASA	
Product code	PA PFN	
Design	Fixed panel right / left	
	Width:	mm
	Height:	mm
	Colour:	
	Glass:	

Order subject to measuring by trained staff or Kermi staff!

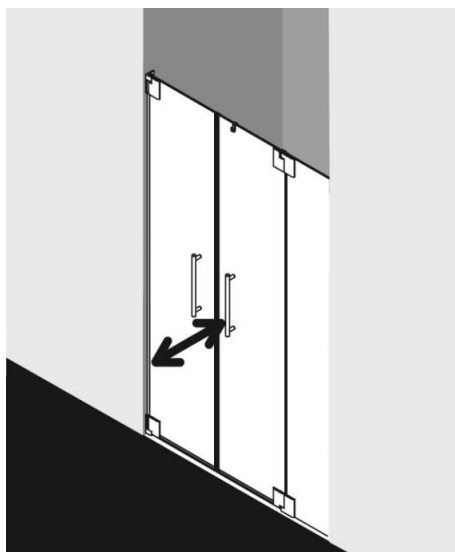

This tender specification is a model specification. Modifications according to the requirements of the contractor always have to be considered. Therefore no claim to accuracy and conformity according to construction tendering and contract regulations. All liability excluded.

Kermi PASA two part hinged door with two fixed panels

As a made to measure solution.

For installation in recess.

Frameless two part hinged door, for inwards and outwards opening, and with two fixed panels.

Optional with PASA stabilizer (inside). The used stabilizer increases the height of the product by 32 mm.

Glass panels with 8 mm single panel safety glass in accordance with EN 12150, with KermiCLEAN as an additional option.

Hinges and handles made of high quality metal.

Hinges of door with rising hinge mechanism and completely integrated on the inside of the glass.

End-to-end magnetic seals and sealing profiles, horizontal sealing strip with water repellent effect.

Can be installed with floor sill (height 6 mm) or without floor sill (off-floor).

Due to the design of PASA 100% water tightness may not be achievable.

Fixing pack and a freely placeable, transparent towel rail hook included in the scope of delivery.

Made in Germany.

Tested in accordance with DIN EN 14428 (CE) and PPP 53005 (TÜV / GS).

20 years guaranteed availability on all spare parts after discontinuation of model.


Quality management system certified in accordance with DIN EN ISO 9001:2015.

Environmental management system certified in accordance with DIN EN 14001:2015.

Energy management system certified in accordance with DIN EN 50001:2011.

Product line	Kermi PASA		
Product code	PA PTN		
Design	Width:		mm
	Height:		mm
	Colour:		
	Glass:		

Order subject to measuring by trained staff or Kermi staff!

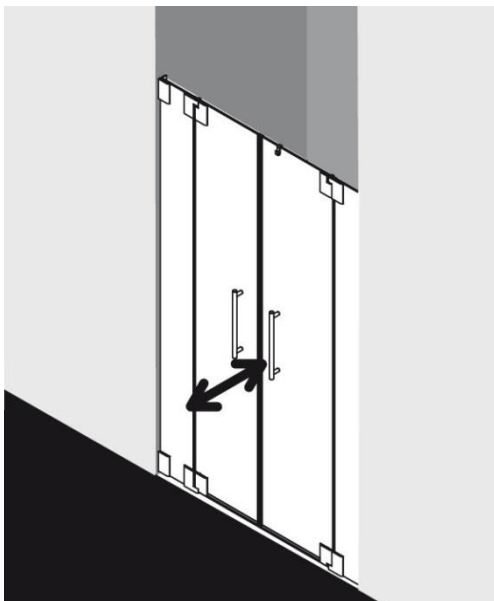

This tender specification is a model specification. Modifications according to the requirements of the contractor always have to be considered. Therefore no claim to accuracy and conformity according to construction tendering and contract regulations. All liability excluded.

Kermi PASA hinged door and side panel

As a made to measure solution.

Frameless door with one glass panel, for inwards and outwards opening, and a frameless side panel.

Side panel with PASA stabilizer (inside) ZDSS VSS PA. The used stabilizer increases the height of the product by 32 mm.

Glass panels with 8 mm single panel safety glass in accordance with EN 12150, with KermiCLEAN as an additional option.

Hinges and handles made of high quality metal.

Hinges of door with rising hinge mechanism and completely integrated on the inside of the glass.

End-to-end magnetic seals and sealing profiles, horizontal sealing strip with water repellent effect.

Can be installed with floor sill (height 6 mm) or without floor sill (off-floor).

Due to the design of PASA 100% water tightness may not be achievable.

Fixing pack and a freely placeable, transparent towel rail hook included in the scope of delivery.

Made in Germany.

Tested in accordance with DIN EN 14428 (CE) and PPP 53005 (TÜV / GS).

20 years guaranteed availability on all spare parts after discontinuation of model.


Quality management system certified in accordance with DIN EN ISO 9001:2015.

Environmental management system certified in accordance with DIN EN 14001:2015.

Energy management system certified in accordance with DIN EN 50001:2011.

Product line	Kermi PASA		Kermi PASA	
Product code	PA 1TW		PA TWD	
Design	Hinge right / left		Side panel right / left	
	Width:	mm	Width:	mm
	Height:	mm	Height:	mm
	Colour:		Colour:	
	Glass:		Glass:	

Order subject to measuring by trained staff or Kermi staff!

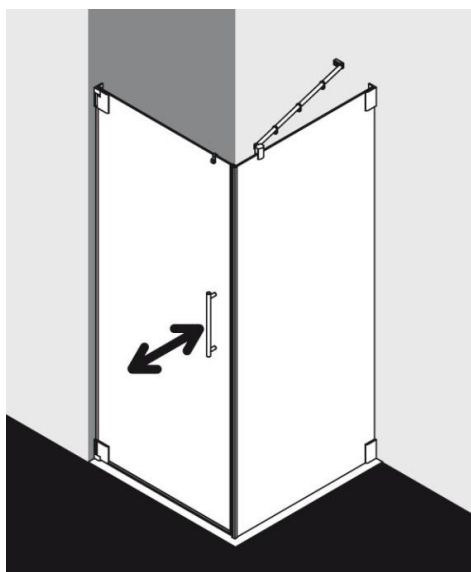

This tender specification is a model specification. Modifications according to the requirements of the contractor always have to be considered. Therefore no claim to accuracy and conformity according to construction tendering and contract regulations. All liability excluded.

Kermi PASA hinged door and fixed panel and side panel

As a made to measure solution.

Frameless door with one glass panel, for inwards and outwards opening, a fixed panel and a frameless side panel.

Side panel with PASA stabilizer (inside), door optional with PASA stabilizer (inside). The used stabilizer increases the height of the product by 32 mm.

Glass panels with 8 mm single panel safety glass in accordance with EN 12150, with KermiCLEAN as an additional option.

Hinges and handles made of high quality metal.

Hinges of door with rising hinge mechanism and completely integrated on the inside of the glass.

End-to-end magnetic seals and sealing profiles, horizontal sealing strip with water repellent effect.

Can be installed with floor sill (height 6 mm) or without floor sill (off-floor).

Due to the design of PASA 100% water tightness may not be achievable.

Fixing pack and a freely placeable, transparent towel rail hook included in the scope of delivery.

Made in Germany.

Tested in accordance with DIN EN 14428 (CE) and PPP 53005 (TÜV / GS).

20 years guaranteed availability on all spare parts after discontinuation of model.


Quality management system certified in accordance with DIN EN ISO 9001:2015.

Environmental management system certified in accordance with DIN EN 14001:2015.

Energy management system certified in accordance with DIN EN 50001:2011.

Product line	Kermi PASA		Kermi PASA	
Product code	PA 1GW		PA GWD	
Design	Hinge right / left		Side panel right / left	
	Width:	mm	Width:	mm
	Height:	mm	Height:	mm
	Colour:		Colour:	
	Glass:		Glass:	

Order subject to measuring by trained staff or Kermi staff!

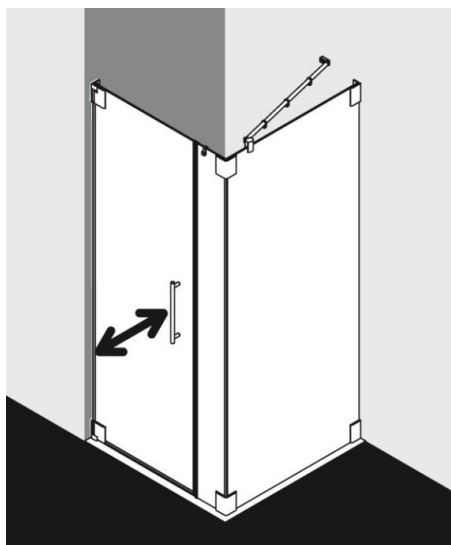

This tender specification is a model specification. Modifications according to the requirements of the contractor always have to be considered. Therefore no claim to accuracy and conformity according to construction tendering and contract regulations. All liability excluded.

Kermi PASA hinged door and fixed panel and side panel

As a made to measure solution.

Frameless door with one glass panel, for inwards and outwards opening, a fixed panel and a frameless side panel.

Side panel with PASA stabilizer (inside), door optional with PASA stabilizer (inside). The used stabilizer increases the height of the product by 32 mm.

Glass panels with 8 mm single panel safety glass in accordance with EN 12150, with KermiCLEAN as an additional option.

Hinges and handles made of high quality metal.

Hinges of door with rising hinge mechanism and completely integrated on the inside of the glass.

End-to-end magnetic seals and sealing profiles, horizontal sealing strip with water repellent effect.

Can be installed with floor sill (height 6 mm) or without floor sill (off-floor).

Due to the design of PASA 100% water tightness may not be achievable.

Fixing pack and a freely placeable, transparent towel rail hook included in the scope of delivery.

Made in Germany.

Tested in accordance with DIN EN 14428 (CE) and PPP 53005 (TÜV / GS).

20 years guaranteed availability on all spare parts after discontinuation of model.

Quality management system certified in accordance with DIN EN ISO 9001:2015.


Environmental management system certified in accordance with DIN EN 14001:2015.

Energy management system certified in accordance with DIN EN 50001:2011.

.

Product line	Kermi PASA		Kermi PASA	
Product code	PA 1SW		PA SWD	
Design	Hinge right / left		Side panel right / left	
	Width:	mm	Width:	mm
	Height:	mm	Height:	mm
	Colour:		Colour:	
	Glass:		Glass:	

Order subject to measuring by trained staff or Kermi staff!

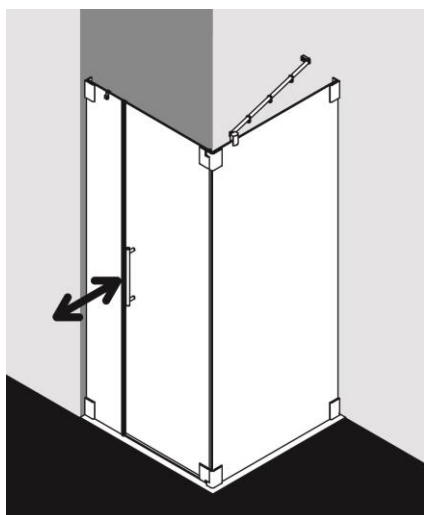

This tender specification is a model specification. Modifications according to the requirements of the contractor always have to be considered. Therefore no claim to accuracy and conformity according to construction tendering and contract regulations. All liability excluded.

Kermi PASA hinged door with fixed panel and side panel

As a made to measure solution.

Frameless door with one glass panel, for inwards and outwards opening, with a fixed panel and a frameless side panel.

Side panel with PASA stabilizer (inside) ZDSS VSS PA, door optional with PASA stabilizer (inside). The used stabilizer increases the height of the product by 32 mm.

Glass panels with 8 mm single panel safety glass in accordance with EN 12150, with KermiCLEAN as an additional option.

Hinges and handles made of high quality metal.

Hinges of door with rising hinge mechanism and completely integrated on the inside of the glass.

End-to-end magnetic seals and sealing profiles, horizontal sealing strip with water repellent effect.

Can be installed with floor sill (height 6 mm) or without floor sill (off-floor).

Due to the design of PASA 100% water tightness may not be achievable.

Fixing pack and a freely placeable, transparent towel rail hook included in the scope of delivery.

Made in Germany.

Tested in accordance with DIN EN 14428 (CE) and PPP 53005 (TÜV / GS).

20 years guaranteed availability on all spare parts after discontinuation of model.


Quality management system certified in accordance with DIN EN ISO 9001:2015.

Environmental management system certified in accordance with DIN EN 14001:2015.

Energy management system certified in accordance with DIN EN 50001:2011.

Product line	Kermi PASA		Kermi PASA	
Product code	PA 1FW		PA TWD	
Design	Hinge right / left		Side panel right / left	
	Width:	mm	Width:	mm
	Height:	mm	Height:	mm
	Colour:		Colour:	
	Glass:		Glass:	

Order subject to measuring by trained staff or Kermi staff!

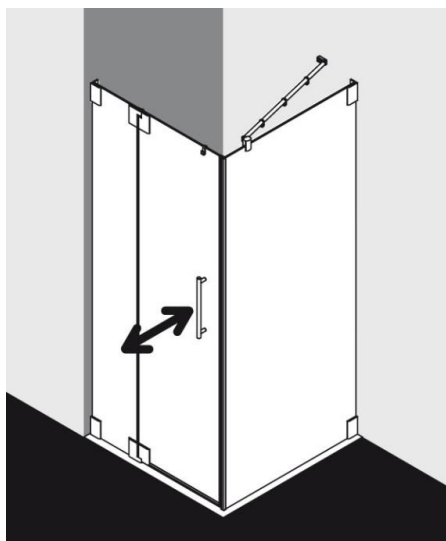

This tender specification is a model specification. Modifications according to the requirements of the contractor always have to be considered. Therefore no claim to accuracy and conformity according to construction tendering and contract regulations. All liability excluded.

Kermi PASA hinged door with two fixed panels and side panel

As a made to measure solution.

Frameless door with one glass panel, for inwards and outwards opening, with two fixed panels and a frameless side panel.

Side panel with PASA stabilizer (inside) ZDSS VSS PA, door optional with PASA stabilizer (inside). The used stabilizer increases the height of the product by 32 mm.

Glass panels with 8 mm single panel safety glass in accordance with EN 12150, with KermiCLEAN as an additional option.

Hinges and handles made of high quality metal.

Hinges of door with rising hinge mechanism and completely integrated on the inside of the glass.

End-to-end magnetic seals and sealing profiles, horizontal sealing strip with water repellent effect.

Can be installed with floor sill (height 6 mm) or without floor sill (off-floor).

Due to the design of PASA 100% water tightness may not be achievable.

Fixing pack and a freely placeable, transparent towel rail hook included in the scope of delivery.

Made in Germany.

Tested in accordance with DIN EN 14428 (CE) and PPP 53005 (TÜV / GS).

20 years guaranteed availability on all spare parts after discontinuation of model.


Quality management system certified in accordance with DIN EN ISO 9001:2015.

Environmental management system certified in accordance with DIN EN 14001:2015.

Energy management system certified in accordance with DIN EN 50001:2011.

Product line	Kermi PASA		Kermi PASA	
Product code	PA 1HW		PA GWD	
Design	Hinge right / left		Side panel right / left	
	Width:	mm	Width:	mm
	Height:	mm	Height:	mm
	Colour:		Colour:	
	Glass:		Glass:	

Order subject to measuring by trained staff or Kermi staff!

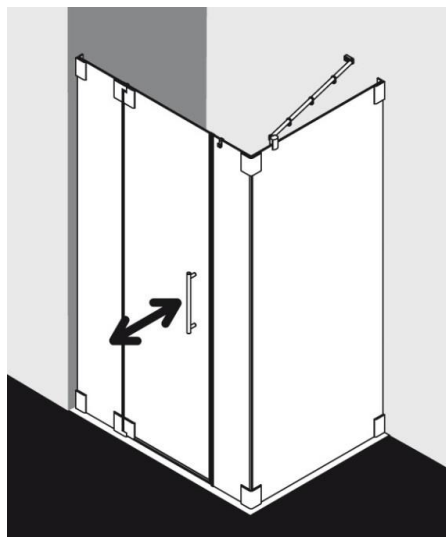

This tender specification is a model specification. Modifications according to the requirements of the contractor always have to be considered. Therefore no claim to accuracy and conformity according to construction tendering and contract regulations. All liability excluded.

Kermi PASA two part hinged door and side panel

As a made to measure solution.

Frameless two part door, for inwards and outwards opening, and a frameless side panel.

Side panel with PASA stabilizer (inside). The used stabilizer increases the height of the product by 32 mm. Glass panels with 8 mm single panel safety glass in accordance with EN 12150, with KermiCLEAN as an additional option.

Hinges and handles made of high quality metal.

Hinges of door with rising hinge mechanism and completely integrated on the inside of the glass.

End-to-end magnetic seals and sealing profiles, horizontal sealing strip with water repellent effect.

Can be installed with floor sill (height 6 mm) or without floor sill (off-floor).

Due to the design of PASA 100% water tightness may not be achievable.

Fixing pack and a freely placeable, transparent towel rail hook included in the scope of delivery.

Made in Germany.

Tested in accordance with DIN EN 14428 (CE) and PPP 53005 (TÜV / GS).

20 years guaranteed availability on all spare parts after discontinuation of model.


Quality management system certified in accordance with DIN EN ISO 9001:2015.

Environmental management system certified in accordance with DIN EN 14001:2015.

Energy management system certified in accordance with DIN EN 50001:2011.

Product line	Kermi PASA		Kermi PASA	
Product code	PA PSW		PA SWD	
Design	Hinged door right / left		Side panel right / left	
	Width:	mm	Width:	mm
	Height:	mm	Height:	mm
	Colour:		Colour:	
	Glass:		Glass:	

Order subject to measuring by trained staff or Kermi staff!

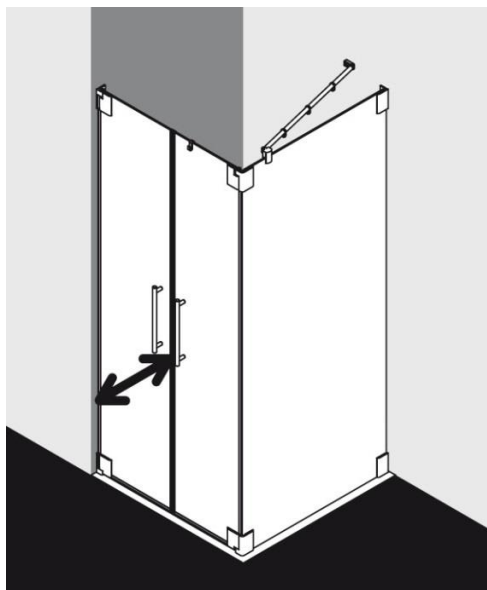

This tender specification is a model specification. Modifications according to the requirements of the contractor always have to be considered. Therefore no claim to accuracy and conformity according to construction tendering and contract regulations. All liability excluded.

Kermi PASA hinged door and shortened side panel beside bathtub

As a made to measure solution.

Frameless door with one glass panel, for inwards and outwards opening, and a shortened frameless side panel beside bathtub.

Side panel with PASA stabilizer (inside) ZDSS VSS PA. The used stabilizer increases the height of the product by 32 mm.

Glass panels with 8 mm single panel safety glass in accordance with EN 12150, with KermiCLEAN as an additional option.

Hinges and handles made of high quality metal.

Hinges of door with rising hinge mechanism and completely integrated on the inside of the glass.

End-to-end magnetic seals and sealing profiles, horizontal sealing strip with water repellent effect.

Can be installed with floor sill (height 6 mm) or without floor sill (off-floor).

Due to the design of PASA 100% water tightness may not be achievable.

Fixing pack and a freely placeable, transparent towel rail hook included in the scope of delivery.

Made in Germany.

Tested in accordance with DIN EN 14428 (CE) and PPP 53005 (TÜV / GS).

20 years guaranteed availability on all spare parts after discontinuation of model.


Quality management system certified in accordance with DIN EN ISO 9001:2015.

Environmental management system certified in accordance with DIN EN 14001:2015.

Energy management system certified in accordance with DIN EN 50001:2011.

Product line	Kermi PASA		Kermi PASA	
Product code	PA 1TV		PA TVD	
Design	Hinge right / left		Side panel right / left	
	Width:	mm	Width:	mm
	Height:	mm	Height:	mm
	Colour:		Colour:	
	Glass:		Glass:	

Order subject to measuring by trained staff or Kermi staff!

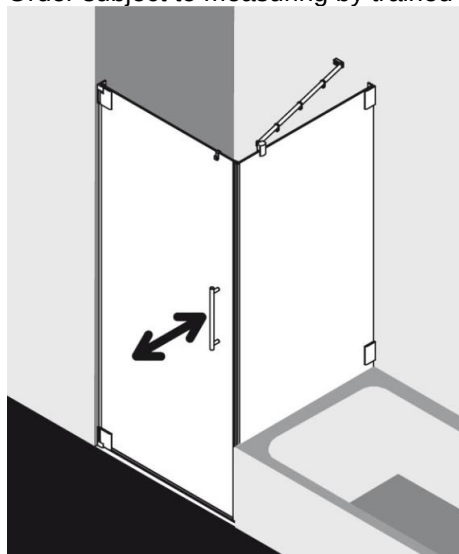

This tender specification is a model specification. Modifications according to the requirements of the contractor always have to be considered. Therefore no claim to accuracy and conformity according to construction tendering and contract regulations. All liability excluded.

Kermi PASA hinged door and fixed panel and shortened side panel on bathtub

As a made to measure solution.

Frameless door with one glass panel, for inwards and outwards opening, a fixed panel and a shortened frameless side panel on bathtub.

Side panel with PASA stabilizer (inside) ZDSS VSS PA, door optional with PASA stabilizer (inside). The used stabilizer increases the height of the product by 32 mm.

Glass panels with 8 mm single panel safety glass in accordance with EN 12150, with KermiCLEAN as an additional option.

Hinges and handles made of high quality metal.

Hinges of door with rising hinge mechanism and completely integrated on the inside of the glass.

End-to-end magnetic seals and sealing profiles, horizontal sealing strip with water repellent effect.

Can be installed with floor sill (height 6 mm) or without floor sill (off-floor).

Due to the design of PASA 100% water tightness may not be achievable.

Fixing pack and a freely placeable, transparent towel rail hook included in the scope of delivery.

Made in Germany.

Tested in accordance with DIN EN 14428 (CE) and PPP 53005 (TÜV / GS).

20 years guaranteed availability on all spare parts after discontinuation of model.


Quality management system certified in accordance with DIN EN ISO 9001:2015.

Environmental management system certified in accordance with DIN EN 14001:2015.

Energy management system certified in accordance with DIN EN 50001:2011.

Product line	Kermi PASA		Kermi PASA	
Product code	PA 1GV		PA GWD	
Design	Hinge right / left		Side panel right / left	
	Width:	mm	Width:	mm
	Height:	mm	Height:	mm
	Colour:		Colour:	
	Glass:		Glass:	

Order subject to measuring by trained staff or Kermi staff!

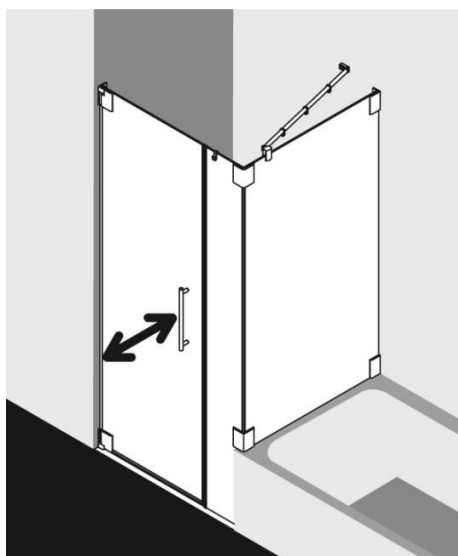

This tender specification is a model specification. Modifications according to the requirements of the contractor always have to be considered. Therefore no claim to accuracy and conformity according to construction tendering and contract regulations. All liability excluded.

Kermi PASA hinged door with fixed panel and shortened side panel beside bathtub

As a made to measure solution.

Frameless door with one glass panel, for inwards and outwards opening, with a fixed panel and a shortened frameless side panel beside bathtub.

Side panel with PASA stabilizer (inside) ZDSS VSS PA, door optional with PASA stabilizer (inside). The used stabilizer increases the height of the product by 32 mm.

Glass panels with 8 mm single panel safety glass in accordance with EN 12150, with KermiCLEAN as an additional option.

Hinges and handles made of high quality metal.

Hinges of door with rising hinge mechanism and completely integrated on the inside of the glass.

End-to-end magnetic seals and sealing profiles, horizontal sealing strip with water repellent effect.

Can be installed with floor sill (height 6 mm) or without floor sill (off-floor).

Due to the design of PASA 100% water tightness may not be achievable.

Fixing pack and a freely placeable, transparent towel rail hook included in the scope of delivery.

Made in Germany.

Tested in accordance with DIN EN 14428 (CE) and PPP 53005 (TÜV / GS).

20 years guaranteed availability on all spare parts after discontinuation of model.


Quality management system certified in accordance with DIN EN ISO 9001:2015.

Environmental management system certified in accordance with DIN EN 14001:2015.

Energy management system certified in accordance with DIN EN 50001:2011.

Product line	Kermi PASA		Kermi PASA	
Product code	PA 1FV		PA TVD	
Design	Hinge right / left		Side panel right / left	
	Width:	mm	Width:	mm
	Height:	mm	Height:	mm
	Colour:		Colour:	
	Glass:		Glass:	

Order subject to measuring by trained staff or Kermi staff!

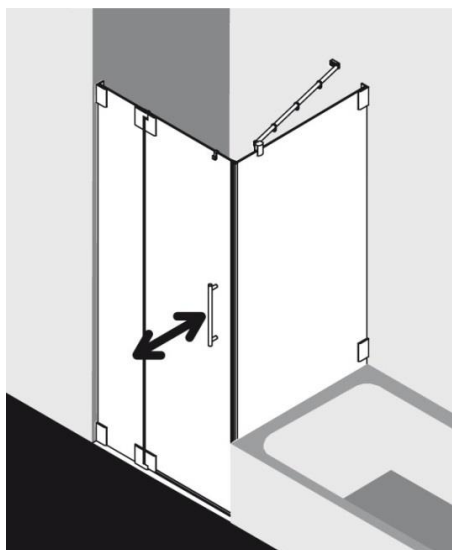

This tender specification is a model specification. Modifications according to the requirements of the contractor always have to be considered. Therefore no claim to accuracy and conformity according to construction tendering and contract regulations. All liability excluded.

Kermi PASA two part corner entry (hinged doors with fixed panels) – half part

As a made to measure solution.

Two part corner entry consisting of PA EPR half part right and PA EPL half part left.

Half parts of different sizes can be combined.

Frameless corner entry with two door panels, for inwards and outwards opening, and with two fixed panels.

Optional with PASA stabilizers (inside). The used stabilizer increases the height of the product by 32 mm.

Glass panels with 8 mm single panel safety glass in accordance with EN 12150, with KermiCLEAN as an additional option.

Hinges and handles made of high quality metal.

Hinges of door with rising hinge mechanism and completely integrated on the inside of the glass.

End-to-end magnetic seals and sealing profiles, horizontal sealing strip with water repellent effect.

Can be installed with floor sill (height 6 mm) or without floor sill (off-floor).

Due to the design of PASA 100% water tightness may not be achievable.

Fixing pack and a freely placeable, transparent towel rail hook included in the scope of delivery.

Made in Germany.

Tested in accordance with DIN EN 14428 (CE) and PPP 53005 (TÜV / GS).

20 years guaranteed availability on all spare parts after discontinuation of model.


Quality management system certified in accordance with DIN EN ISO 9001:2015.

Environmental management system certified in accordance with DIN EN 14001:2015.

Energy management system certified in accordance with DIN EN 50001:2011.

Product line	Kermi PASA		
Product code	PA EPR/L		
Design	Half part right / half part left		
	Width right:	mm	
	Width left:	mm	
	Height:	mm	
	Colour:		
	Glass:		

Order subject to measuring by trained staff or Kermi staff!

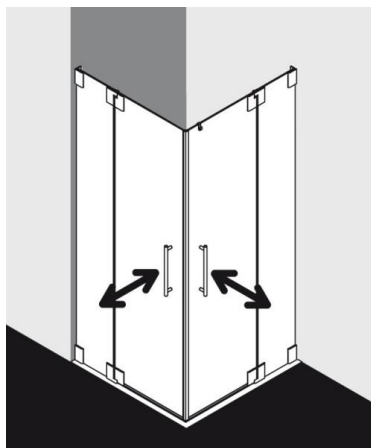

This tender specification is a model specification. Modifications according to the requirements of the contractor always have to be considered. Therefore no claim to accuracy and conformity according to construction tendering and contract regulations. All liability excluded.

Kermi PASA quadrant shower enclosure (two part hinged door with fixed panels)

As a made to measure solution.

Frameless quadrant shower enclosure with two door panels, for inwards and outwards opening, and with two fixed panels.

Optional with PASA stabilizer (inside). The used stabilizer increases the height of the product by 32 mm.

Glass panels with 8 mm single panel safety glass in accordance with EN 12150, with KermiCLEAN as an additional option.

Hinges and handles made of high quality metal.

Hinges of door with rising hinge mechanism and completely integrated on the inside of the glass.

End-to-end magnetic seals and sealing profiles, horizontal sealing strip with water repellent effect.

Can be installed with floor sill (height 6 mm) or without floor sill (off-floor).

Due to the design of PASA 100% water tightness may not be achievable.

Fixing pack and a freely placeable, transparent towel rail hook included in the scope of delivery.

Made in Germany.

Tested in accordance with DIN EN 14428 (CE) and PPP 53005 (TÜV / GS).

20 years guaranteed availability on all spare parts after discontinuation of model.



Quality management system certified in accordance with DIN EN ISO 9001:2015.

Environmental management system certified in accordance with DIN EN 14001:2015.

Energy management system certified in accordance with DIN EN 50001:2011.

Product line	Kermi PASA	
Product code	PA PRD	
Design	Radius:	mm
	Width right:	mm
	Width left:	mm
	Height:	mm
	Colour:	
	Glass:	

Order subject to measuring by trained staff or Kermi staff!

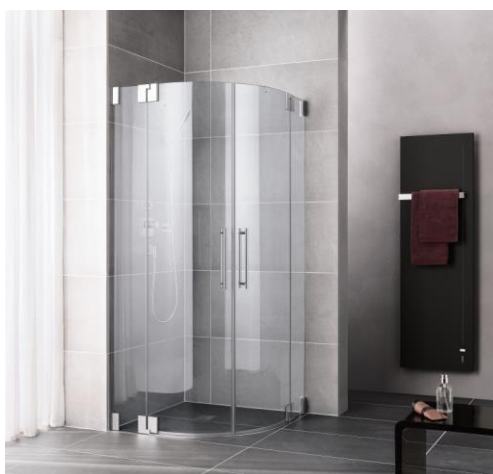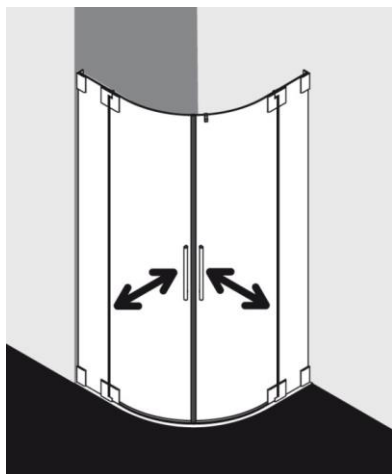

This tender specification is a model specification. Modifications according to the requirements of the contractor always have to be considered. Therefore no claim to accuracy and conformity according to construction tendering and contract regulations. All liability excluded.

Kermi PASA quadrant shower enclosure (hinged door with fixed panels)

As a made to measure solution.

Frameless quadrant shower enclosure with one glass panel, for outwards opening, and with two fixed panels.

With PASA stabilizer (inside) ZDSS VSS PA. Optional with second PASA stabilizer (inside) ZDSS VSS PA. The used stabilizer increases the height of the product by 32 mm.

Glass panels with 8 mm single panel safety glass in accordance with EN 12150, with KermiCLEAN as an additional option.

Hinges and handles made of high quality metal.

Hinges of door with rising hinge mechanism and completely integrated on the inside of the glass.

End-to-end magnetic seals and sealing profiles, horizontal sealing strip with water repellent effect.

Can be installed with floor sill (height 6 mm) or without floor sill (off-floor).

Due to the design of PASA 100% water tightness may not be achievable.

Fixing pack and a freely placeable, transparent towel rail hook included in the scope of delivery.

Made in Germany.

Tested in accordance with DIN EN 14428 (CE) and PPP 53005 (TÜV / GS).

20 years guaranteed availability on all spare parts after discontinuation of model.


Quality management system certified in accordance with DIN EN ISO 9001:2015.

Environmental management system certified in accordance with DIN EN 14001:2015.

Energy management system certified in accordance with DIN EN 50001:2011.

Product line	Kermi PASA		
Product code	PA RDR/L		
Design	Hinge right / left		
	Radius:	mm	
	Width right:	mm	
	Width left:	mm	
	Height:	mm	
	Colour:		
	Glass:		

Order subject to measuring by trained staff or Kermi staff!

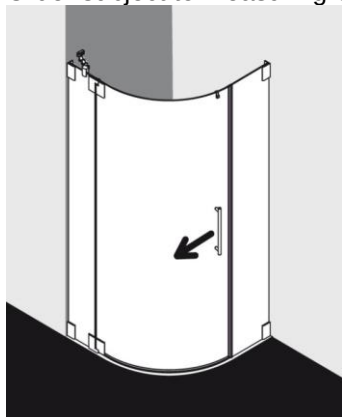

This tender specification is a model specification. Modifications according to the requirements of the contractor always have to be considered. Therefore no claim to accuracy and conformity according to construction tendering and contract regulations. All liability excluded.

Kermi PASA pentagon shower enclosure (hinged door with fixed panels)

As a made to measure solution.

Frameless pentagon shower enclosure with one glass panel, for inwards and outwards opening, and with two fixed panels.

With PASA stabilizer (inside) ZDSS VSS PA. Optional with second PASA stabilizer (inside) ZDSS VSS PA. The used stabilizer increases the height of the product by 32 mm.

Glass panels with 8 mm single panel safety glass in accordance with EN 12150, with KermiCLEAN as an additional option.

Hinges and handles made of high quality metal.

Hinges of door with rising hinge mechanism and completely integrated on the inside of the glass.

End-to-end magnetic seals and sealing profiles, horizontal sealing strip with water repellent effect.

Can be installed with floor sill (height 6 mm) or without floor sill (off-floor).

Due to the design of PASA 100% water tightness may not be achievable.

Fixing pack and a freely placeable, transparent towel rail hook included in the scope of delivery.

Made in Germany.

Tested in accordance with DIN EN 14428 (CE) and PPP 53005 (TÜV / GS).

20 years guaranteed availability on all spare parts after discontinuation of model.

Quality management system certified in accordance with DIN EN ISO 9001:2015.

Environmental management system certified in accordance with DIN EN 14001:2015.

Energy management system certified in accordance with DIN EN 50001:2011.

Product line Kermi PASA

Product code PA EFR/L

Design Hinge right / left

Width right: mm


Width left: mm

Height: mm

Colour:

Glass:

Order subject to measuring by trained staff or Kermi staff!

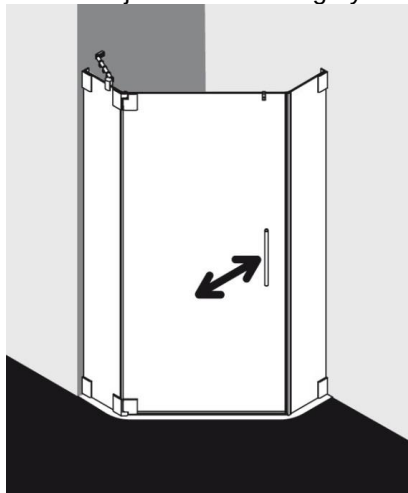

This tender specification is a model specification. Modifications according to the requirements of the contractor always have to be considered. Therefore no claim to accuracy and conformity according to construction tendering and contract regulations. All liability excluded.

Kermi PASA pentagon shower enclosure (two part hinged door with fixed panels)

As a made to measure solution.

Frameless pentagon shower enclosure with two door panels, for inwards and outwards opening, and with two fixed panels.

Optional with PASA stabilizer (inside). The used stabilizer increases the height of the product by 32 mm.

Glass panels with 8 mm single panel safety glass in accordance with EN 12150, with KermiCLEAN as an additional option.

Hinges and handles made of high quality metal.

Hinges of door with rising hinge mechanism and completely integrated on the inside of the glass.

End-to-end magnetic seals and sealing profiles, horizontal sealing strip with water repellent effect.

Can be installed with floor sill (height 6 mm) or without floor sill (off-floor).

Due to the design of PASA 100% water tightness may not be achievable.

Fixing pack and a freely placeable, transparent towel rail hook included in the scope of delivery.

Made in Germany.

Tested in accordance with DIN EN 14428 (CE) and PPP 53005 (TÜV / GS).

20 years guaranteed availability on all spare parts after discontinuation of model.


Quality management system certified in accordance with DIN EN ISO 9001:2015.

Environmental management system certified in accordance with DIN EN 14001:2015.

Energy management system certified in accordance with DIN EN 50001:2011.

Product line	Kermi PASA		
Product code	PA PFD		
Design	Width right:		mm
	Width left:		mm
	Height:		mm
	Colour:		
	Glass:		

Order subject to measuring by trained staff or Kermi staff!

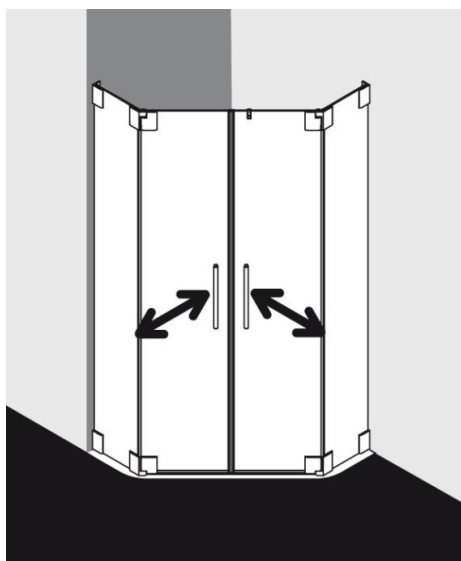

This tender specification is a model specification. Modifications according to the requirements of the contractor always have to be considered. Therefore no claim to accuracy and conformity according to construction tendering and contract regulations. All liability excluded.

Kermi WALK-IN PASA Wall

As a made to measure solution.

Frameless WALK-IN shower with wall fixation.

With 90° PASA stabilizer ZDSS S90 PA. The used stabilizer increases the height of the product by 32 mm.

Glass panels with 8 mm single panel safety glass in accordance with EN 12150 with KermiCLEAN as an additional option.

Hinges made of high quality metal.

Stabilizer made from anodised aluminium and high quality metal.

Hinges completely integrated on the inside of the glass.

Due to the design of PASA 100% water tightness may not be achievable.

Fixing pack and a freely placeable, transparent towel rail hook included in the scope of delivery.

Made in Germany.

Tested in accordance with DIN EN 14428 (CE) and PPP 53005 (TÜV / GS).

20 years spare part availability guarantee after the model has been discontinued.

Quality management system certified in accordance with DIN EN ISO 9001:2015.

Environmental management system certified in accordance with DIN EN 14001:2015.

Energy management system certified in accordance with DIN EN 50001:2011.

Product line Kermi PASA

Product code PA TWF

Design WALK-IN Wall right / left


Width: mm

Height: mm

Colour:

Glass:

Order subject to measuring by trained staff or Kermi staff!

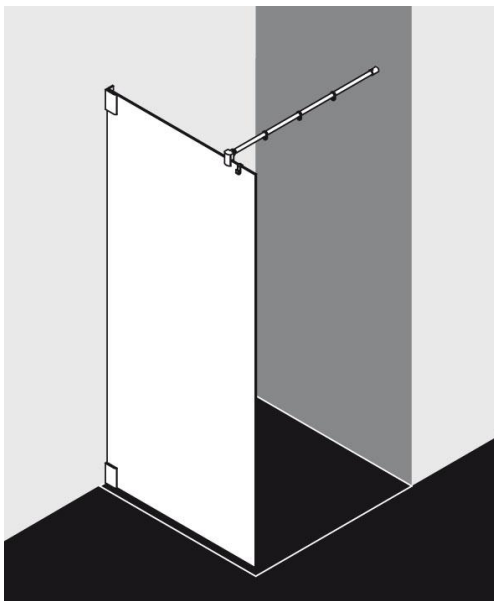

This tender specification is a model specification. Modifications according to the requirements of the contractor always have to be considered. Therefore no claim to accuracy and conformity according to construction tendering and contract regulations. All liability excluded.